

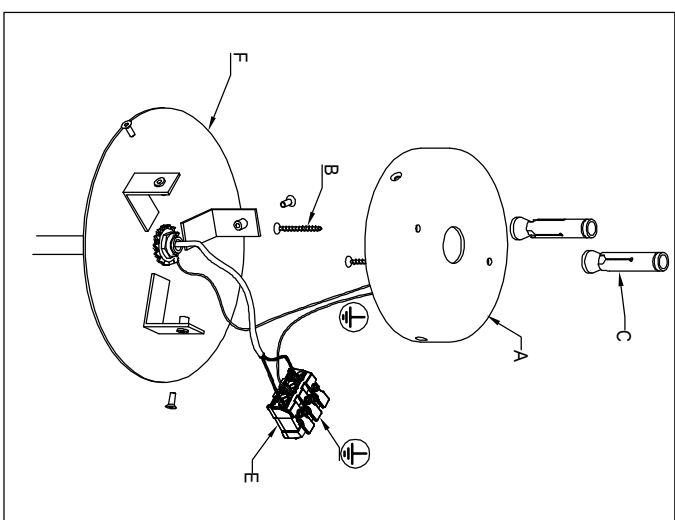
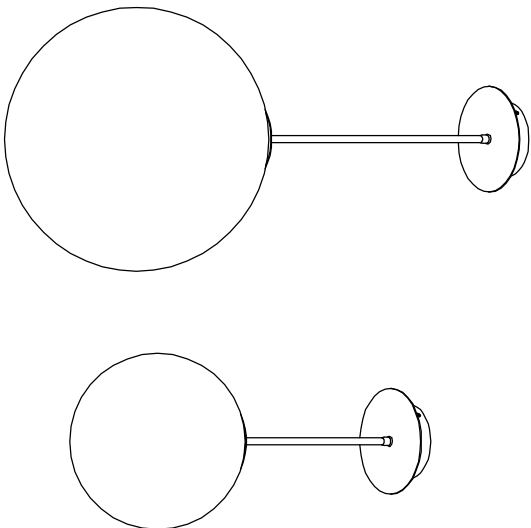


Fig. 1

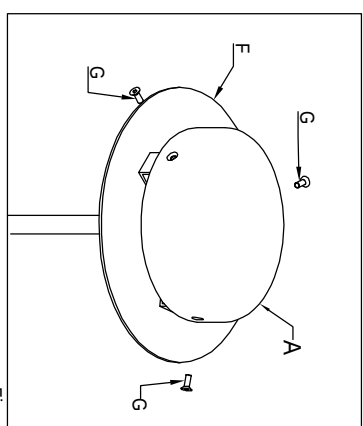


Fig. 2

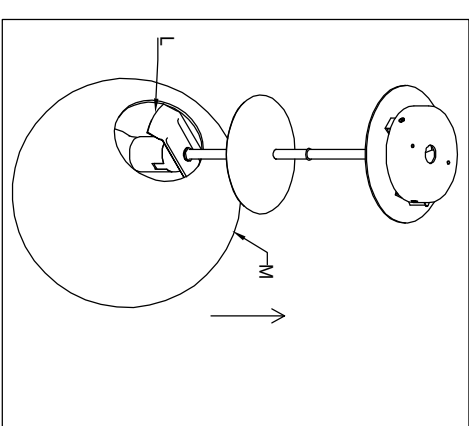


Fig. 4

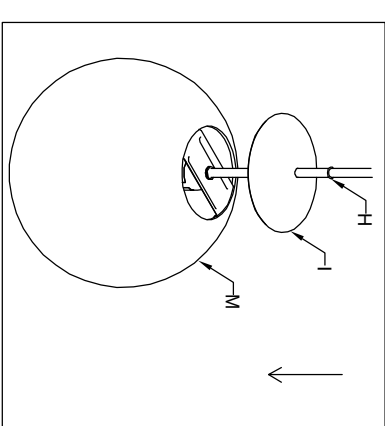


Fig. 5

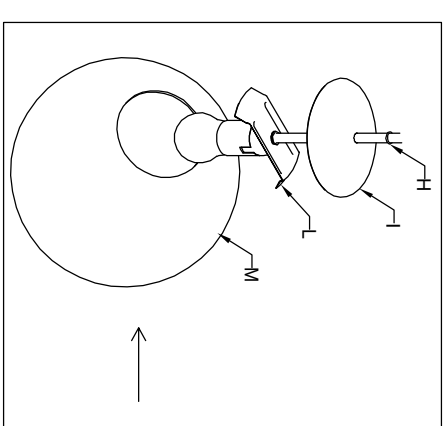


Fig. 3

ISTRUZIONI DI MONTAGGIO

- Staccare la corrente di alimentazione.
- Fissare il rosone (A) al soffitto mediante le viti (B) e i tasselli (C) dopo aver fatto passare i cavi di alimentazione all'interno del foro centrale (Fig. 1).
- Collegare i cavi di rete nel morsetto (E) rispettando le polarità (Fig. 1).
- Fissare la staffa inferiore (F) al rosone (A) utilizzando le viti (G) (Fig. 2).
- Avvitare la lampadina al portalampe.
- Spostare verso l'alto la guarnizione (H) e la lente (I) (Fig. 3).
- Ruotare leggermente la sfera (M) ed avvicinarla alla struttura: inserire la lampadina, fissata al portalampe, e la staffa (L) nella sfera (M) (Fig. 4).
- Allineare la sfera (M) alla struttura, abbassare la sfera in modo che appoggi sulla staffa (L); abbassare la lente (I) e la bloccarla con la guarnizione (H) (Fig. 5).

ATTENZIONE

Gli apparecchi di nostra costruzione sono ideati all'uso in ambienti ordinari con temperatura ambiente ad umidità relativa standard. Tutte le operazioni devono essere eseguite da un tecnico specializzato.

PULIZIA

Staccare la corrente di alimentazione o la spina dalla presa.

Per la pulizia periodica degli apparecchi di illuminazione usare sempre i guanti ed uno straccio morbido (in caso di superfici lisce) o un piumino del tipo con manico per la finitura in tessuto o plissé. Non usare mai solventi o alcool.

Evitare nel modo più assoluto di piegare parti non previste per la mobilità delle stesse, in quanto ciò potrebbe indebolire o rompere le stesse.

INSTRUCTION

- Switch off the power or pull the plug out.
- Fix on the ceiling the ceiling rose (A) with the screws (B) and the dowels (C), before let the network cables in the central hole (Fig. 1).
- Connect the network cables at the clamps (E) by checking the polarity (Fig. 1).
- Fix the particular (F) on the ceiling rose (A) using screw (G) (Fig. 2).
- Screw the light bulb in the lamp socket.
- Move up the o-ring (H) and the particular (I) (Fig. 3).
- Rotate the ball (M) and move near the structure: insert the light bulb, the lamp socket and the bracket (L) into the ball (M) (Fig. 4).
- Align the ball (M) to the structure, move down the ball until it rests on the bracket (L); move down the particular (I) and fix with the o-ring (H) (Fig. 5).

ATTENTION

The products of our production are suitable for the using in usual surroundings with standard temperature and humidity levels. All the operations have to be done by a technician.

CLEANING


Switch off the power or pull the plug out.

For the periodical cleaning of the lamp use always gloves and a soft cloth (for glossy surfaces) or a feather duster for the lampshade in fabric or pleated fabric. Don't use aggressive solvents or alcohol.

Avoid absolutely to fold parts which are not expected for folding, in this case welded parts are going to be damaged.




MULTIBALL $\phi 25$
MULTIBALL $\phi 30$
MULTIBALL $\phi 40$
MULTIBALL $\phi 45$



1 x max 42W E27 HES
1 x max 52W E27 HES
1 x max 52W E27 HES
1 x max 70W E27 HES



1 x 11W E27 goccia fluo
1 x 15W E27 goccia fluo
1 x 20W E27 goccia fluo
1 x 20W E27 goccia fluo
1 x 20W E27 goccia fluo



1 x 6W E27 LED
1 x 8W E27 LED
1 x 8W E27 LED
1 x 11W E27 LED
1 x 11W E27 LED